

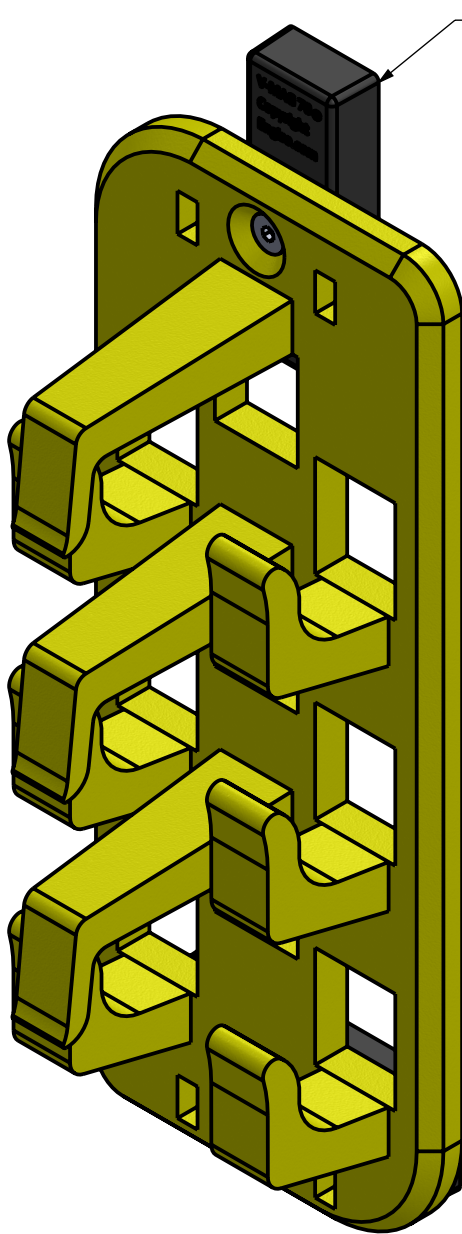
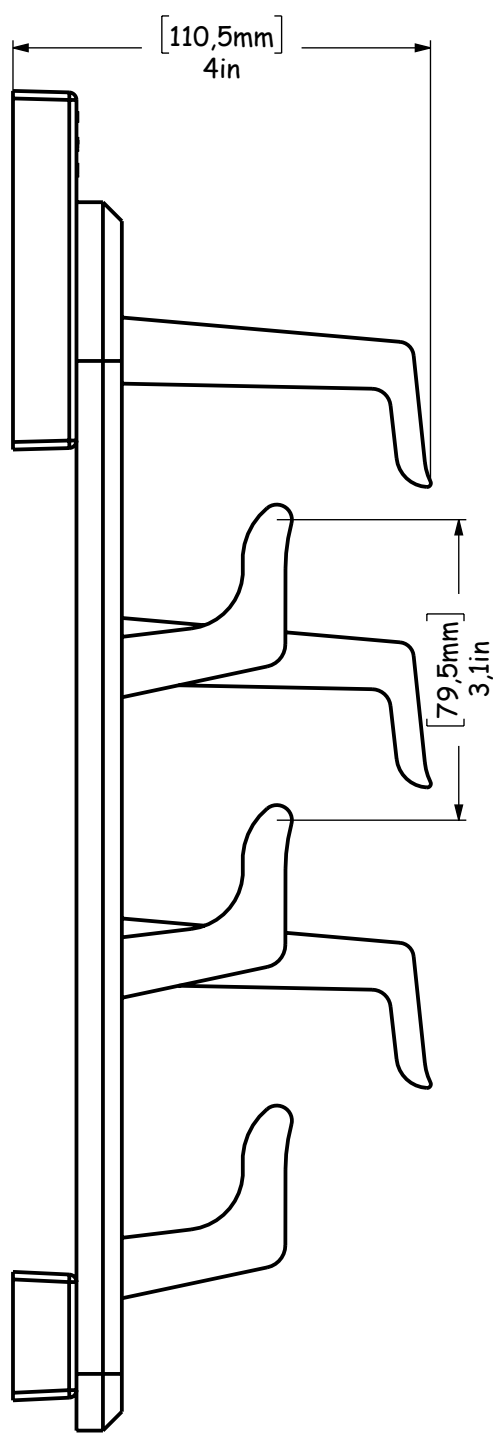
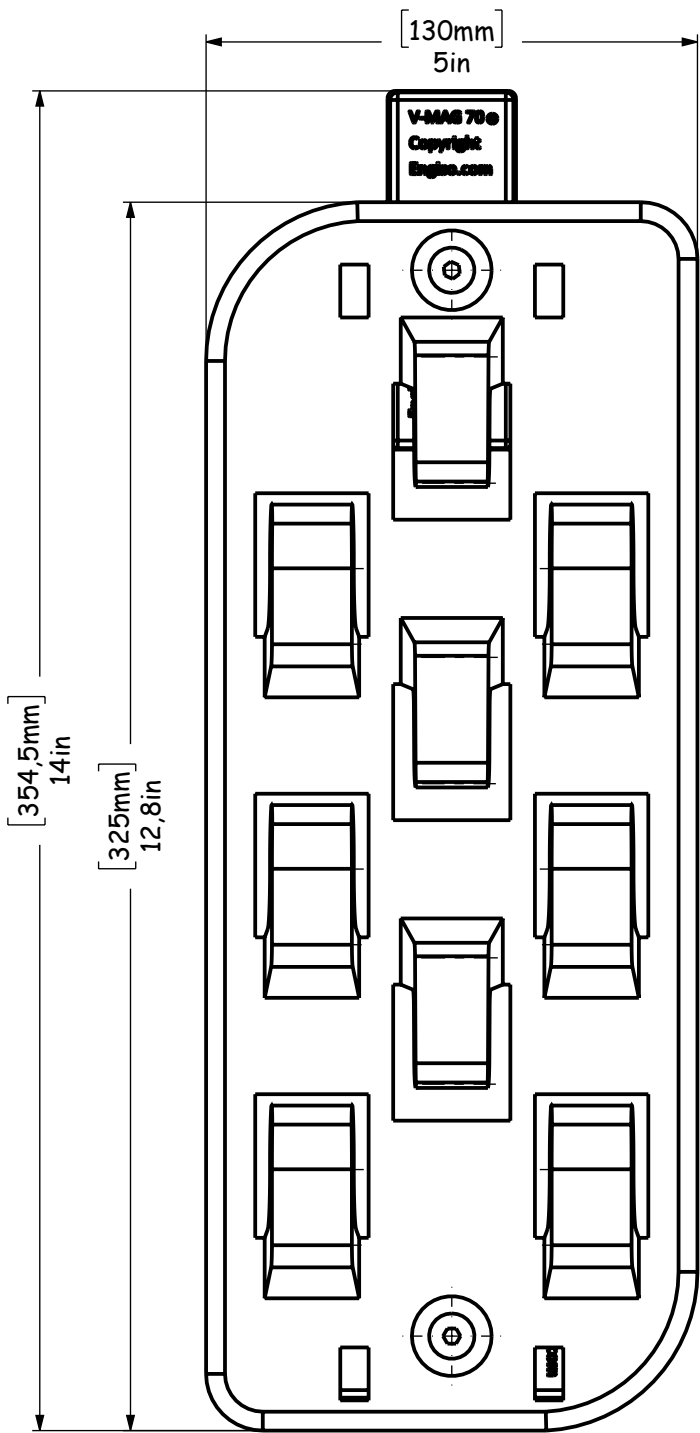


Cables: Max 3 X OD 1.25"

30182-V-MAG 70© Magnetic Temporary Cable Rail CSCR HD 300

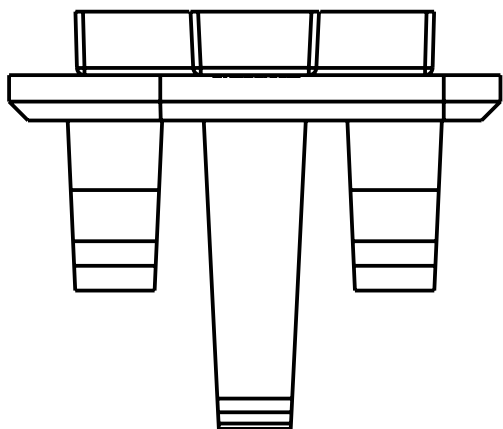

V-MAG© 70

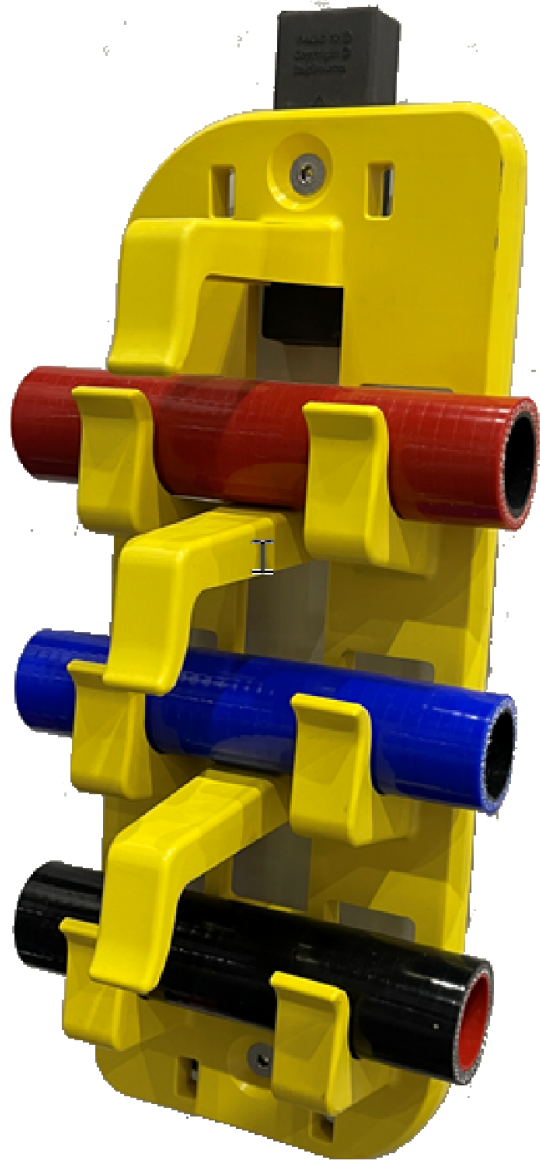


This drawing belongs Engiso, and may not be disclosed to third parties or used otherwise.

All sharp edges deburred.








ENGISO®
ENGINEERED SOLUTIONS

Phone: (+45) 70 23 00 75
E-mail: info@Engiso.com

	Linear tolerance	0-10	10-50	50-500	500-1000	1000-
		± 0.1	± 0.2	± 0.5	± 0.8	± 1
Created: 9. maj 2022		Ini: ANO		Updated: 13. november 2022		Ini: ANO
Surface treatment:						Approver: B.Ø.
Material: Material <not specified>		Weight: 2.4 Kg				
Material Cert. EN10204:		Item: Cablerail-CSCR-HD-300				
Unit: Metric						
A3	Sheet : 1 of 2	SCALE 1:2	Drawing no.: 30182_000		Rev:	

Cables: Max 3 X OD 1.25"

30182-V-MAG 70© Magnetic Temporary Cable Rail CSCR HD 300

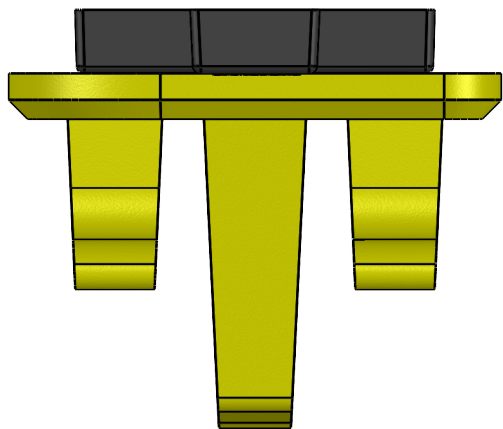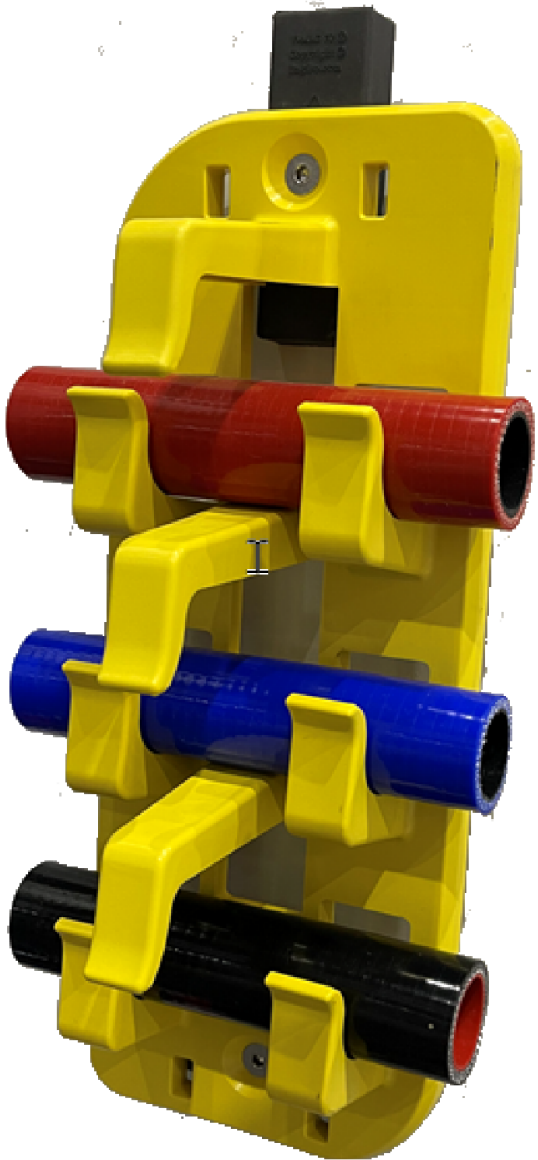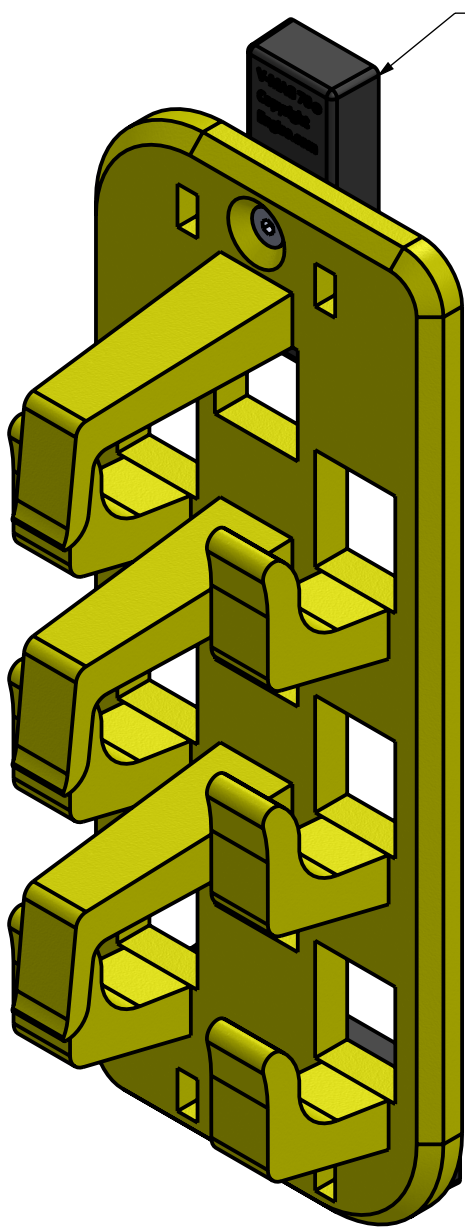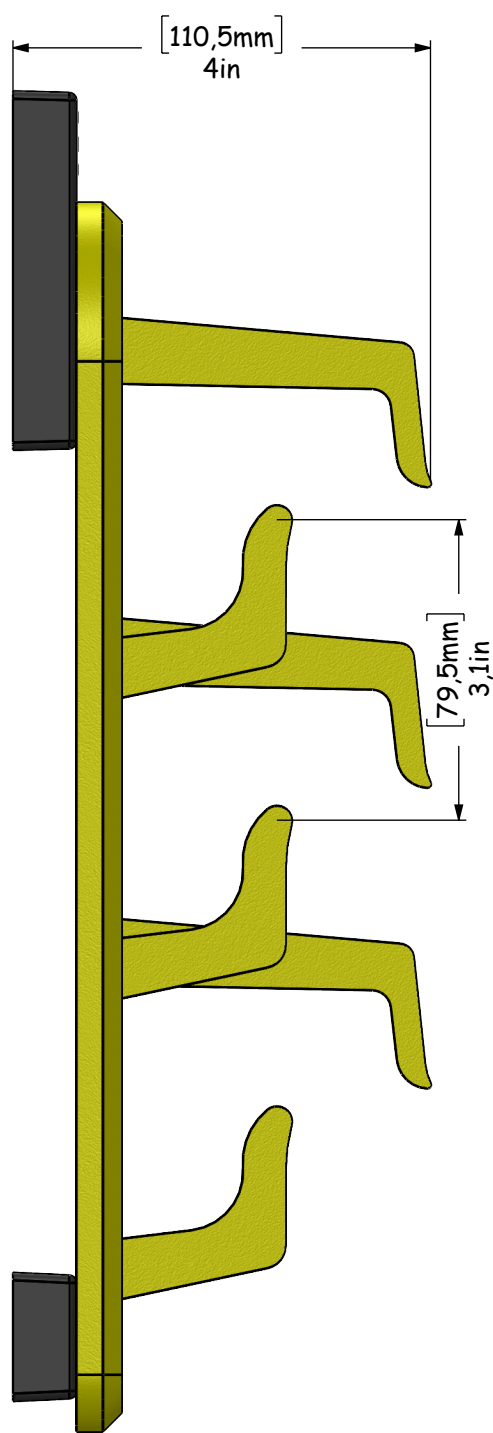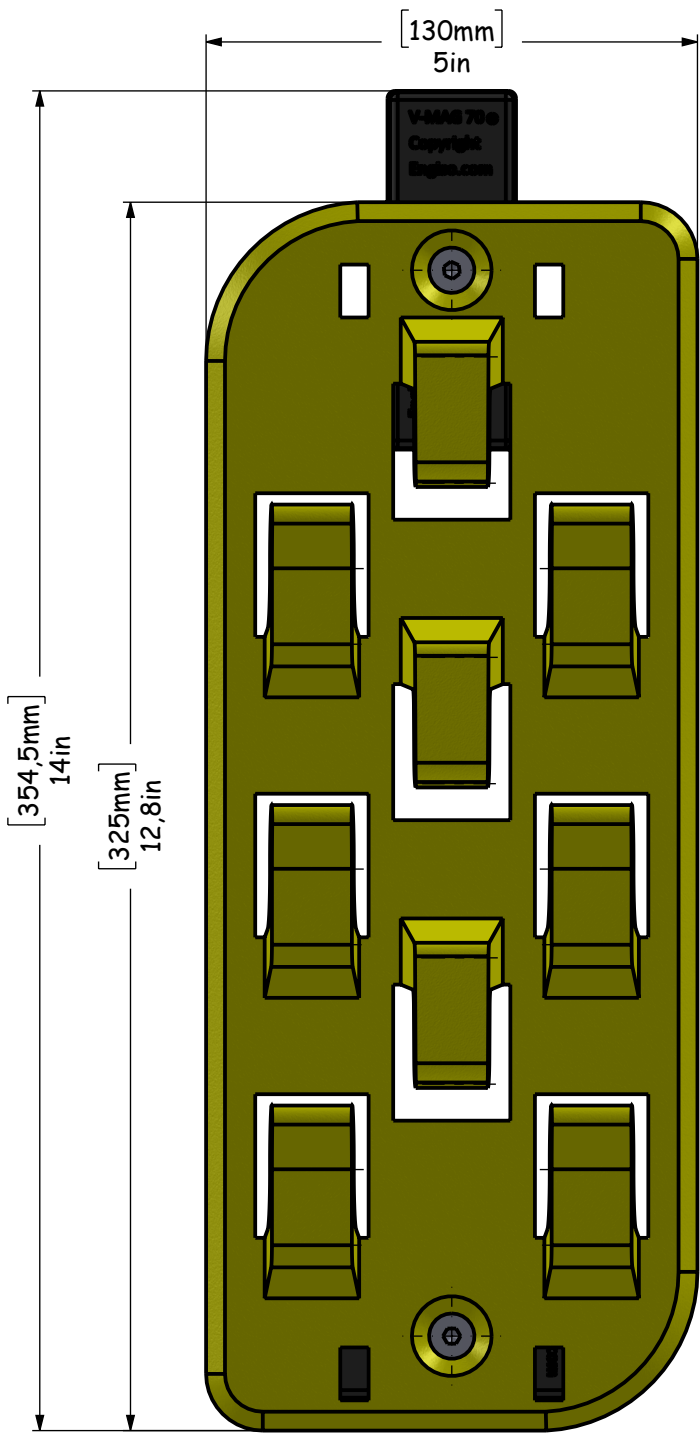


This drawing belongs Engiso, and may not be disclosed to third parties or used otherwise.

All sharp edges deburred.



Phone: (+45) 70 23 00 75
E-mail: info@Engiso.com

	Linear tolerance	0-10	10-50	50-500	500-1000	1000-
		± 0.1	± 0.2	± 0.5	± 0.8	± 1
Created: 9. maj 2022		Ini: ANO	Updated: 13. november 2022			Ini: ANO
Surface treatment:						Approver: B.Ø.
Material: Material <not specified>		Weight: 2.4 Kg				
Material Cert. EN10204:		Item: Cablerail-CSCR-HD-300				
Unit: Metric						
A3	Sheet : 2 of 2	SCALE 1:2	Drawing no.: 30182_000			Rev: